





QUIÉTUDE



Data sheet n°021

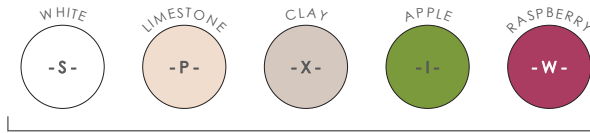

colour touch storages

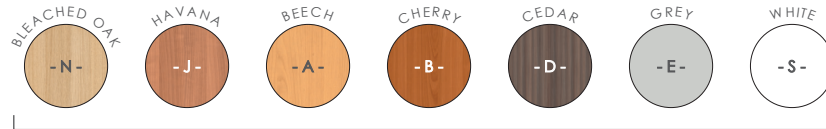


wood MFC and plain finishes

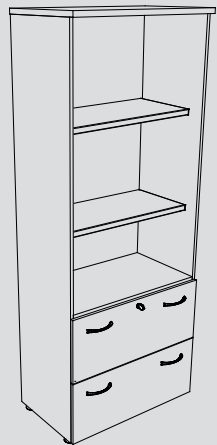

STRUCTURE STORAGE


- Material : Structurex®- MFC*, thickness 16 mm, edging thin.
- 5 screw jacks H 23 mm, adjustable from the inside to compensate for unevenness in the floor or to achieve a perfect alignment between several units.

Assembly: metal pins screwed on to metal inserts and fixed with metal tightening cams.



HINGED DOORS

- Equipment : plastic and rubber noise-proof pads.
- Angle of opening : metal hinges allow 100° opening.
- Locks have interchangeable cylinders and are supplied with 2 keys, one folding plastic-coated.




FRONT

- Material: frosted safety glass door surrounded by a Alu frame.
- Handles: metal aluminium epoxy finish, knob-shaped with ergonomic design for easy grip.
- Angle of opening : metal hinges allow 90 °opening.

or

- Material : Structurex®- MFC*, thickness 16 mm, edging ABS.
- Handles: metal aluminium epoxy finish with notches for easy grip. Available in White or Anthracite finish on option.



SLIDING DOORS

- Only for storages L 158 / H 72 cm and L 120 / H 104 cm.
- Equipment : 1 plastic stop on one of the doors allows to avoid the shocks. Push-button for centralised locking.







Assembly : Doors clipped in rails anti-noise.

In accordance with NF EN 14073-1/-2/-3, NF D 62041.

*Structurex®- MFC: Melamine-Finished Chipboard, decorative coating imitating a choice of wood species. Counter-balanced and treated against reflection. Density: 636 Kg/m³ (± 5%) for thickness 25 mm




The data contained in this sheet was correct at the time of going to press. The data sheet is not systematically updated unless the basic characteristics of the product are modified. The manufacturer reserves the right to modify its products, without notice.

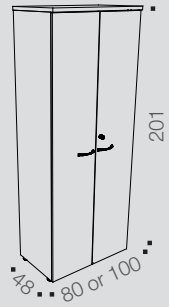

LF Drawer

- Equipment : metal frames with an anti-tilt system.
- Locking : 2-point locking system with selective lock.
- Extraction : 100 %
- Storage L 80 : 0,76 m of filing per drawer, foolscap side to side and A4 front to back.
- Storage L 100 : 0,89 m of filing per drawer, foolscap front to back and A4 side to side.



TOP

The top is compulsory for storages H 72, H 104 and H 136 cm and optional for storages H 201 cm. Exist in L 160 / L 200 and L 240 cm to connect several storages together.


Assembly: metal inserts screws.

- Material: Structurex®- MFC*, thickness 25 mm, edging ABS.



Roll out filing frame

- 2 frame per storage H 136 cm, 3 frame per storage H 201 cm.
- The roll out filing frame is equipped with an anti-tilt system.



SHELVES

Useful Dim. D 36,2 / L 76,2 cm for storage L 80 or L 96,2 cm for storage L 100 cm. Adjustable in 32 mm steps.

- Material : Structurex®- MFC*, thickness 25 mm, edging ABS.
- Maximum load: 15 kg.

or

- Material: folded sheet steel epoxy Aluminium finish for L.F.
- Maximum load: 20 kg.


In accordance with NF EN 14073-1/-2/-3, NF D 62041.

*Structurex®- MFC: Melamine-Finished Chipboard, decorative coating imitating a choice of wood species.

Counter-balanced and treated against reflection. Density: 636 Kg/m³ (± 5%) for thickness 25 mm



The data contained in this sheet was correct at the time of going to press. The data sheet is not systematically updated unless the basic characteristics of the product are modified. The manufacturer reserves the right to modify its products, without notice.

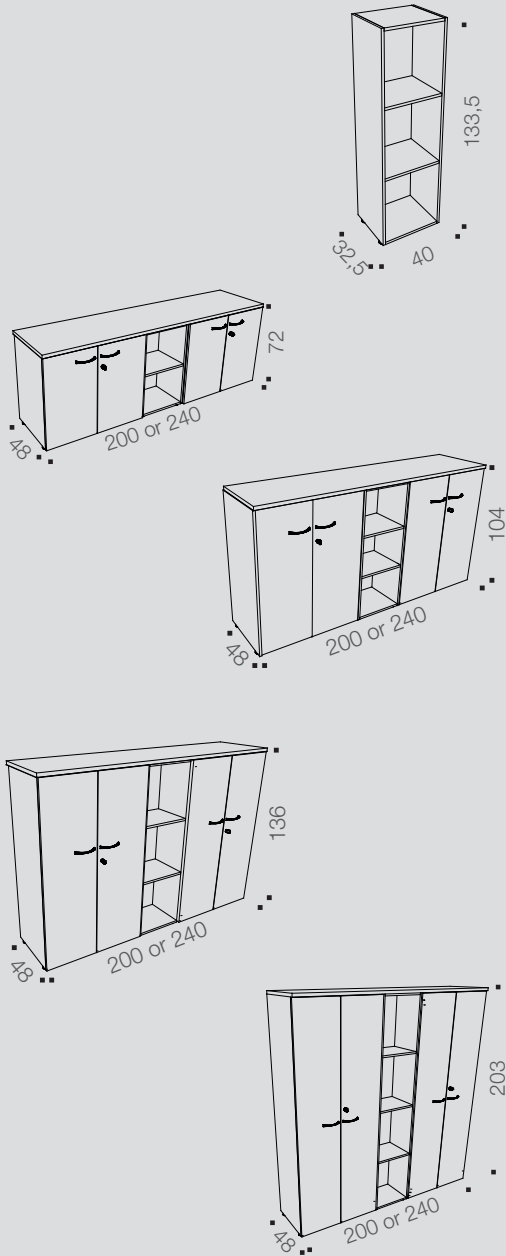

STRUCTURE COLUMNS

Columns can group together or become integrated between two storages.

- Material : Structurex®- MFC*, thickness : 16 mm.
- Edging: 2 mm thick shock-proof ABS.
- Fixed shelves.
- 4 screw jacks H 23 mm black finish, adjustable from the inside to compensate for unevenness in the floor or to achieve a perfect alignment between several units.

Assembly: gudgeons screwed with cams tightening and pins wood.

- Outside dimension: L 40 cm / D 32,5 cm ; Useful dimension : L 36,8 cm / D 30,8 cm.
- Height including screw jacks
 H 69,5 cm (2 niches H 31,8 cm)
 H 101,5 cm (2 niches H 31,8 cm + central niche H 29,3 cm)
 H 133,5 cm (2 niches H 41,5 cm + central niche H 41,8 cm)
 H 200,5 cm (4 niches H 47,6 cm)

TOP COLUMN

They allow to connect up to 5 columns together.

- Material: Structurex®- MFC*, thickness : 25 mm.
- Edging: 2 mm thick shock-proof ABS.
- Height including screw jacks and top
 H 72 cm (2 niches)
 H 104 cm (3 niches)
 H 136 cm (3 niches)
 H 203 cm (4 niches)



MULTISTORAGE LINKING TOP

Columns can also be placed between C01 storage units to form a longer layout.

L 200 cm = 2 storages L 80 cm

+ 1 column L 40 cm

L 240 cm = 2 storages L 100 cm

+ 1 column L 40 cm


• Material : Structurex®- MFC*, thickness : 25 mm

• Edging: 2 mm thick shock-proof ABS.

or

• Material : Nitech®, thickness 38 mm.

• Edging: anti-shock reinforcement edging in ABS, thickness 2 mm.



In accordance with NF EN 14073-1/-2/-3, NF D 62041.

*Structurex®- MFC: Melamine-Finished Chipboard, decorative coating imitating a choice of wood species.

Counter-balanced and treated against reflection. Density: 636 Kg/m³ (± 5%) for thickness 25 mm

The data contained in this sheet was correct at the time of going to press. The data sheet is not systematically updated unless the basic characteristics of the product are modified. The manufacturer reserves the right to modify its products, without notice.